

TLH系列-非凯-公制M

M系列金属电缆接头

电缆接头 (填料函)

cable gland

电缆接头 (填料函)

Cable gland



材质 Material	黄铜镀镍或不锈钢304、316L (订货时请指明) Brass nickel plated or stainless steel 304, 316L (When ordering, please specify)		
特点 Features	适用于各种普通电缆 Applicable to all kinds of ordinary cable		
密封件 Seals	硅橡胶 silastic	防护等级 Degree of protection	IP68-10巴压力 (旋紧部分) IP68-10 bar (Screwing part)
工作温度 COT	-60°C ~100°C短时120°C -60°C ~100°C, Short time 120°C		




材质 Material	黄铜镀镍 (订货时请指明) Brass nickel plated (When ordering, please specify)		
夹紧件 Claw	尼龙塑料(PA) Nickel plastic(PA)		
密封件 Seals	丁腈橡胶(NBR) NBR	防护等级 Degree of protection	IP68-10巴压力 (旋紧部分) IP68-10 bar (Screwing part)
工作温度 COT	-40°C ~100°C短时120°C -40°C ~100°C, Short time 120°C		



1、可选附件: 变径接头、锁紧螺母、O型圈、平垫圈、锯齿垫圈、接地片

1、Optionnal accessories: reducer union, lockion nut, O Ring, flat washer, serrated washers, grounding

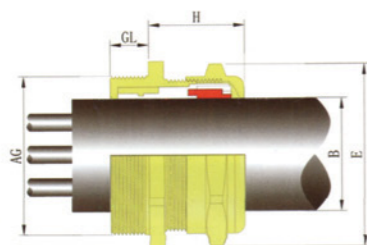

订购示例 (e.g.): TLH-M32X1.5

单位:mm

规格型号 Gland size	入口螺纹尺寸外径AG Entry Thread size AG	适用电缆外径B Outher Sheath B	GL	H	E
TLH-M12X1.5	M12X1.5	3-6.5	10	20	17
TLH-M16X1.5S	M16X1.5	4-8	10	20	20
TLH-M16X1.5	M16X1.5	5-10	10	23	25
TLH-M20X1.5S	M20X1.5	6-12	10	23	27
TLH-M20X1.5	M20X1.5	10-14	10	23	29
TLH-M25X1.5	M25X1.5	13-18	12	25	36
TLH-M32X1.5S	M32X1.5	15-22	12	25	40
TLH-M32X1.5	M32X1.5	18-25	12	30	46
TLH-M36X2	M36X2	19-28	15	32	51
TLH-M40X1.5	M40X1.5	22-32	15	34	57
TLH-M50X1.5	M50X1.5	32-38	15	34	67
TLH-M63X1.5	M63X1.5	37-44	15	39	83
TLH-M63X1.5B	M63X1.5	43-52	15	42	83
TLH-M70X2	M70X2	43-52	15	43	92
TLH-M75X1.5	M75X1.5	51-60	15	66	101
TLH-M90X2	M90X2	56-70	15	68	110

特殊平紧爪与平紧圈之设计, 夹紧电缆范围大, 抗拉力强, 可防水, 防尘抗盐抗盐、耐弱酸、酒精、油、油脂及一般溶剂。

Special design of clamping claw and clamping ring, wide clamping range, high stretching resistance, wate proof, dustproof, salt resistant, resistant for weak acid, alcohol, oil, grease and genral solvent



单位:mm

螺牙规格AG Specification of thread	适用电缆 Cable Range	螺牙外径 Outer diameter of thread	机板口径 Mounting hole diameter	螺纹长度GL Thread length	螺纹长度加长型GL Thread length (lengthened type)	接合长度H Joint length	扳手径 Wrench diameter
M8 x 1.25	4-2	8mm	8-8.2	5mm	7mm	16mm	11mm
M10 x 1.5	6-3	10mm	10-10.2	5mm	7mm	16mm	12mm
M12 x 1.5	6.5-3	12mm	12-12.2	7mm	10mm	19mm	14mm
M14 x 1.5	8-4	14mm	14-14.2	7mm	10mm	19mm	18mm
M16 x 1.5	8-4	16mm	16-16.2	8mm	10mm	20mm	18mm
M18 x 1.5	10-5	18mm	18-18.2	8mm	10mm	21mm	20mm
M20 x 1.5	12-6	20mm	20-20.2	8mm	15mm	22mm	22mm
M22 x 1.5	10-14	22mm	22-22.2	8mm	15mm	23mm	24mm
M24 x 1.5	10-14	24mm	24-24.2	9mm	15mm	25mm	24/27mm
M25 x 1.5	10-14	25mm	25-25.2	9mm	15mm	25mm	24/27mm
M25 x 1.5	18-13	25mm	25-25.2	9mm	15mm	27mm	30/27mm
M27 x 1.5(2)	18-13	27mm	27-27.2	9mm	15mm	27mm	30mm
M28 x 1.5(2)	18-13	28mm	28-28.2	9mm	15mm	27mm	30mm
M30 x 1.5(2)	18-13	30mm	30-30.2	9mm	15mm	29mm	30/32mm
M32 x 1.5(2)	22-15	32mm	32-32.2	10mm	15mm	29mm	35mm
M33 x 1.5(2)	22-15	33mm	33-33.2	10mm	15mm	29mm	35mm
M36 x 1.5(2)	25-18	36mm	36-36.2	10mm	15mm	31mm	40mm
M37 x 1.5(2)	25-18	37mm	37-37.2	10mm	15mm	31mm	40mm
M40 x 1.5(2)	25-18	40mm	40-40.2	11mm	15mm	31mm	40/45mm
M40 x 1.5(2)	30-22	40mm	40-40.2	11mm	15mm	35mm	45mm
M42 x 1.5(2)	30-22	42mm	42-42.2	11mm	15mm	35mm	45mm
M47 x 1.5(2)	33-25	47mm	47-47.2	11mm	15mm	37mm	50mm
M48 x 1.5(2)	33-25	48mm	48-48.2	11mm	15mm	37mm	50mm
M50 x 1.5(2)	38-32	50mm	50-50.2	12mm	15mm	37mm	57/55mm
M54 x 1.5(2)	38-32	54mm	54-54.2	12mm	15mm	38mm	57mm
M60 x 1.5(2)	44-37	60mm	60-60.2	13mm	15mm	38mm	65mm
M63 x 1.5(2)	44-37	63mm	63-63.2	13mm	15mm	38mm	65mm
M64 x 1.5(2)	44-37	64mm	64-64.2	13mm	15mm	38mm	65/68mm
M72 x 1.5	52-42	72mm	72-72.2	15mm	20mm	42mm	77mm